



61NM,62NM $6.35\phi \times 32$

玻璃保险丝管(速断型) GLASS TUBE FUSE (FAST-BLOW)

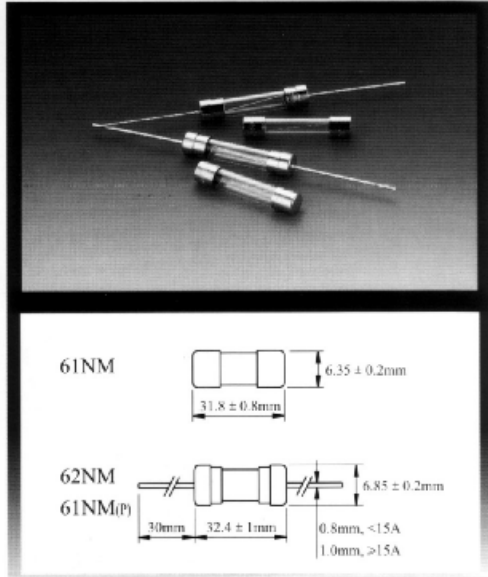

I-T CHARACTERISTICS CURVE
 电流-时间曲线图

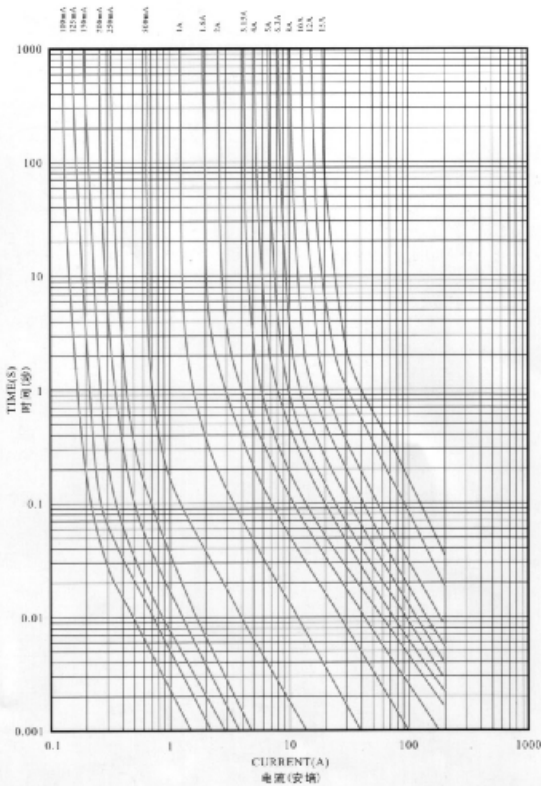

目录编号 CATALOG NO.	额定电流 AMPERE RATING	认证 APPROVALS								I ² T 参考值 REFERENCE (A ² S)
		UL		CSA		PSE		KTL		
		H	L	H	L	H	L	H	L	
0032H/L	32mA	●	●	●	●					0.00031
0050H/L	50mA	●	●	●	●					0.00087
0063H/L	63mA	●	●	●	●					0.0014
0080H/L	80mA	●	●	●	●					0.0018
0100H/L	100mA	●	●	●	●				●	0.0026
0125H/L	125mA	●	●	●	●				●	0.0059
0150H/L	150mA	●	●	●	●				●	0.0082
0160H/L	160mA	●	●	●	●				●	0.010
0200H/L	200mA	●	●	●	●				●	0.019
0250H/L	250mA	●	●	●	●				●	0.026
0300H/L	300mA	●	●	●	●				●	0.052
0315H/L	315mA	●	●	●	●				●	0.058
0350H/L	350mA	●	●	●	●				●	0.075
0400H/L	400mA	●	●	●	●				●	0.12
0500H/L	500mA	●	●	●	●				●	0.17
0600H/L	600mA	●	●	●	●				●	0.38
0630H/L	630mA	●	●	●	●				●	0.45
0750H/L	750mA	●	●	●	●				●	0.68
0800H/L	800mA	●	●	●	●				●	0.92
010H/L	1A	●	●	●	●	●	●	●	●	1.8
012H/L	1.2A	●	●	●	●	●	●	●	●	2.5
0131H/L	1.25A	●	●	●	●	●	●	●	●	2.7
015H/L	1.5A	●	●	●	●	●	●	●	●	4.3
016H/L	1.6A	●	●	●	●	●	●	●	●	7.7
020H/L	2A	●	●	●	●	●	●	●	●	20
025H/L	2.5A	●	●	●	●	●	●	●	●	31
030H/L	3A	●	●	●	●	●	●	●	●	36
032H/L	3.15A	●	●	●	●	●	●	●	●	39
035H/L	3.5A	●	●	●	●	●	●	●	●	49
040H/L	4A	●	●	●	●	●	●	●	●	58
050H/L	5A	●	●	●	●	●	●	●	●	100
060H/L	6A	●	●	●	●	●	●	●	●	150
063H/L	6.3A	●	●	●	●	●	●	●	●	173
070H/L	7A	●	●	●	●	●	●	●	●	214
080H/L	8A	●	●	●	●	●	●	●	●	265
090H/L	9A	●	●	●	●	●	●	●	●	335
100H/L	10A	●	●	●	●	●	●	●	●	413
120H/L	12A					●	●			2000
150H/L	15A					●	●			2880

H DENOTES FOR 250V (H表示250V)

L DENOTES FOR 125V (L表示125V)

● DENOTES FOR APPROVED (●表示已取得认证)

分断电流:

INTERRUPTING RATING

10,000 amperes at 125V AC (32mA-10A)

35 amperes at 250V AC (32mA-1A)

100 amperes at 250V AC (1.2A-3.5A)

200 amperes at 250V AC (4A-10A)

500 amperes at 125V AC (1A-15A) PSE

100 amperes at 250V AC (100mA-15A) PSE,KTL

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING	熔断时间 BLOWING TIME
100%	4 hours Min (最快4小时)
135%	1 hour Max (最慢1小时)
200%	5 sec Max (最慢5秒)