


50F 5.2<sup>φ</sup> × 20

低分断能力玻璃保险丝管(速断型)

LOW-BREAKING CAPACITY GLASS TUBE FUSE(QUICK-ACTING)

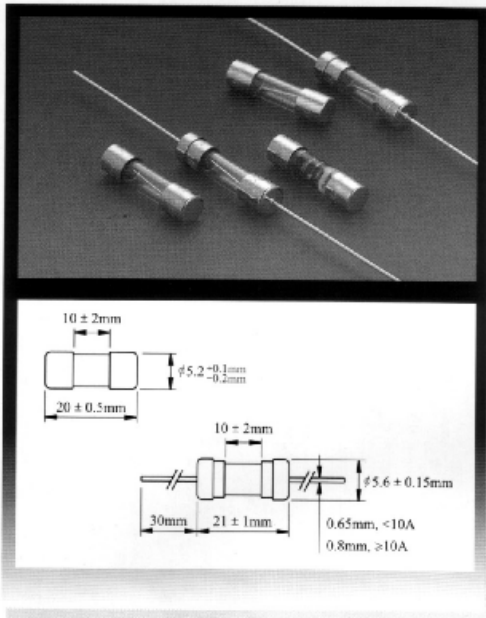


目录编号 CATALOG NO.	额定电流 AMPERE RATING	最大电压降 mv MAX VOLTAGE DROP	认证 APPROVALS							I <sub>T</sub> 参考值 REFERENCE (A.S)	
			CCC	SEMKO	VDE	BSI	IMQ	UR	CSA		KTL
0160H	160mA	2000								●	0.014
0200H	200mA	1700	●	●	●	●	●	●	●	●	0.042
0250H	250mA	1400	●	●	●	●	●	●	●	●	0.082
0315H	315mA	1300	●	●	●	●	●	●	●	●	0.13
0400H	400mA	1200	●	●	●	●	●	●	●	●	0.21
0500H	500mA	1000	●	●	●	●	●	●	●	●	0.33
0630H	630mA	650	●	●	●	●	●	●	●	●	0.55
0750H	750mA	400	●	●	●	●	●	●	●	●	0.80
0800H	800mA	240	●	●	●	●	●	●	●	●	1.2
010H	1A	200	●	●	●	●	●	●	●	●	1.6
013H	1.25A	200	●	●	●	●	●	●	●	●	2.0
016H	1.6A	190	●	●	●	●	●	●	●	●	3.4
020H	2A	170	●	●	●	●	●	●	●	●	5.2
025H	2.5A	170	●	●	●	●	●	●	●	●	8.2
032H	3.15A	150	●	●	●	●	●	●	●	●	13
040H	4A	130	●	●	●	●	●	●	●	●	22
050H	5A	130	●	●	●	●	●	●	●	●	39
063H	6.3A	130	●	●	●	●	●	●	●	●	71

H DENOTES FOR 250V (H 表示250V)

● DENOTES FOR APPROVED (● 表示已取得认证)

I-T CHARACTERISTICS CURVE  
电流-时间曲线图

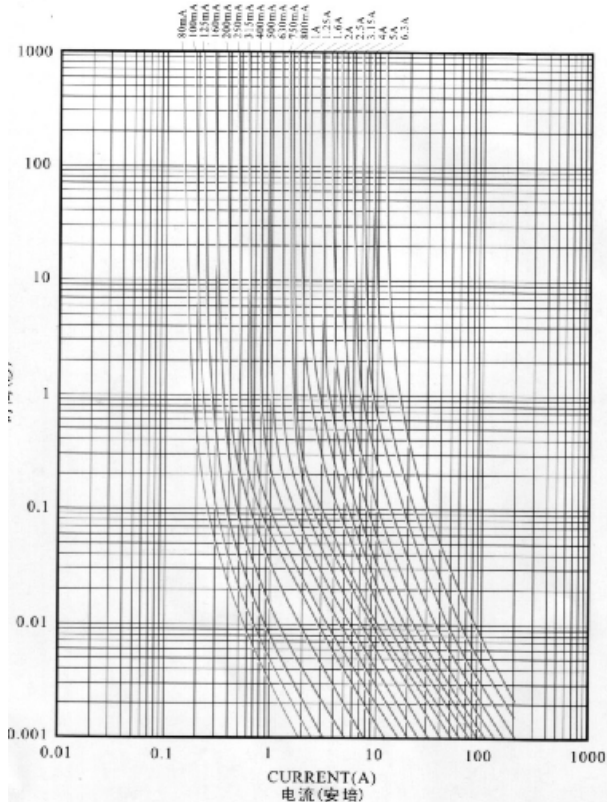

分断电流:

BREAKING CAPACITY:

35A OR 10I<sub>n</sub> WHICHEVER IS GREATER

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME	
		32-100mA	125mA&OVER
2.1I <sub>n</sub>	Max (最慢)	30min	30min
	Min (最快)	10ms	50ms
2.75I <sub>n</sub>	Max (最慢)	500ms	2sec
	Min (最快)	3ms	10ms
4I <sub>n</sub>	Max (最慢)	100ms	300ms
	Min (最快)	20ms	20ms