

SNAP ACTION SWITCHES

Features

- Auxiliary Actuators for type VS and VT Micro Switches
- Metal and Plastic material are both available.
- Many options of the button are available.
- Easy to install



Specifications

Item	Standard
Rating	10A 250VAC /16A 250VAC UL1054
Contact Resistance	50mΩ max. (initial)
Dielectric Resistance	AC 1000V (50/60 Hz for 1minute)
Insulation Resistance	100MΩ min. (at 500 VDC)
Electrically Life	100,000 Cycles min.
Mechanically Life	1,000,000 Cycles min.

Product Selection

VAQ-4 -□-□-□-□

1 2 3 4 5

1.ACTUATOR TYPES

- VAQ-4: Nylon(φ 13mm)
- VAQ-5: Nylon(φ 19mm)
- AB5151: Metal(φ 13mm)
- AB6161: Metal(φ 19mm)

2.BUTTON COLOR

- R: Red
- Y: Yellow
- G: Green

3.CURRENT RATING

- 10: 10A 250VAC VS SERIES(S)
- 16: 16A 250VAC VT SERIES(C)
- ___: WITHOUT (S)

4. CONTACT

- 1: 1 NC & 1NO(S)
- 2: NC(C)
- 3: NO(C)

5.TERMINAL

- | VS SERIES (10A) | VT SERIES(16A) |
|--------------------------|--------------------------|
| A: Solder(C) | A: Solder(C) |
| B: Screw(C) | C: 250 Quick Connect(C) |
| C: 250 Quick Connect(C) | C2: 187 Quick Connect(C) |
| C2: 187 Quick Connect(S) | |

*(S)=Standard (C) =Customization

HIGHLY

B20

Design, specifications are subject to change without notice.

SNAP ACTION SWITCHES

Dimensions



Unit: mm

Item No.

Dimensions



VAQ-4

Assembly VS Series switch

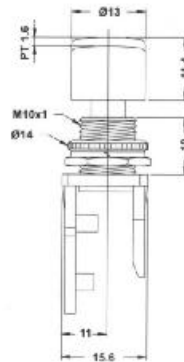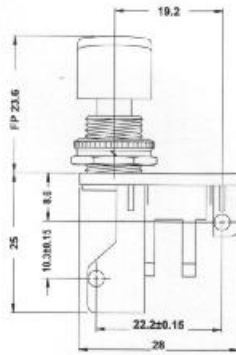



VAQ-5

Assembly VS Series switch





AB5151

Assembly VS Series switch



AB6161

Assembly VS Series switch



HIGHLY

B21

Design, specifications are subject to change without notice.