
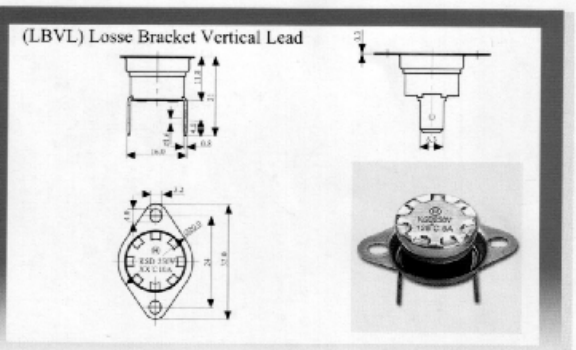
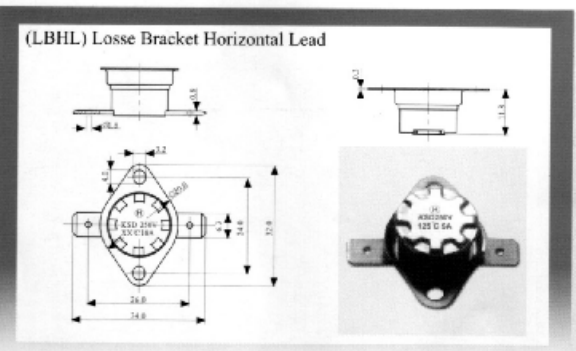
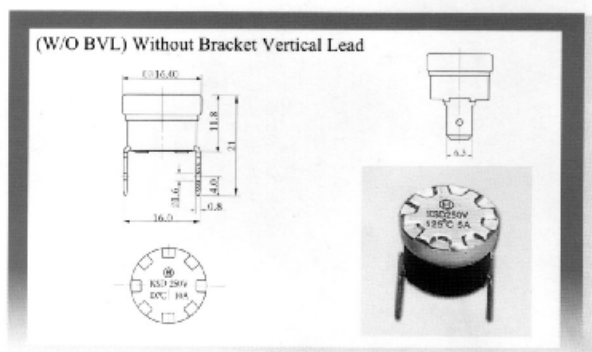
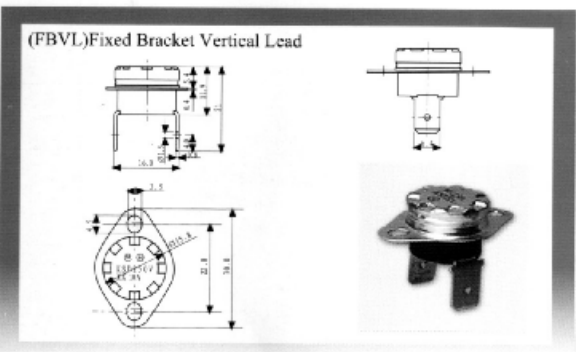
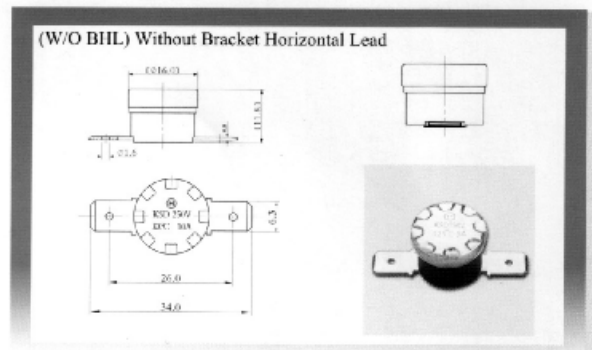


KSD-F01系列 (KSD-F01 SERIES)

温度保护器 THERMOSTAT

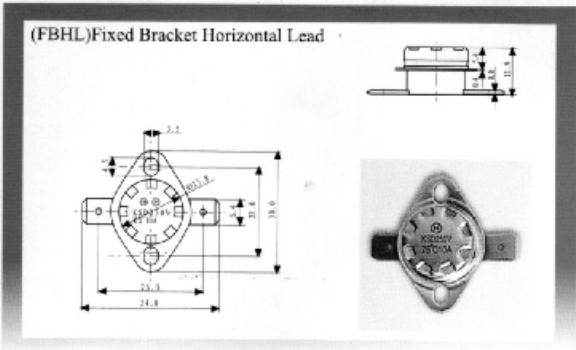

单位Unit:mm

KSD-F01

额定动作温度 Rated Functioning Temp. T _{off} (°C)	恢复温度 Reset Temp. T _{on} (°C)	额定电压 Voltage AC(V)	额定电流 Current (A)	认证 Approvals
				TUV
48 ± 3	35 ± 8	250	5, 10	
55 ± 3	40 ± 8	250	5, 10	
58 ± 3	42 ± 8	250	5, 10	
60 ± 3	45 ± 5	250	5, 10	
65 ± 3	48 ± 5	250	5, 10	
70 ± 3	55 ± 5	250	5, 10	●
75 ± 3	55 ± 7	250	5, 10	●
80 ± 3	60 ± 7	250	5, 10	●
85 ± 3	65 ± 7	250	5, 10	●
90 ± 3	70 ± 10	250	5, 10	●
95 ± 3	70 ± 10	250	5, 10	●
100 ± 3	70 ± 10	250	5, 10	●
105 ± 3	80 ± 10	250	5, 10	●
110 ± 3	85 ± 10	250	5, 10	●
115 ± 5	85 ± 15	250	5, 10	●
120 ± 5	90 ± 15	250	5, 10	●
125 ± 5	95 ± 10	250	5, 10	●
130 ± 5	95 ± 10	250	5, 10	●
135 ± 5	100 ± 10	250	5, 10	●
140 ± 5	110 ± 10	250	5, 10	●
145 ± 5	110 ± 10	250	5, 10	●
150 ± 7	120 ± 10	250	5, 10	●
155 ± 7	120 ± 10	250	5, 10	●
160 ± 10	130 ± 15	250	5, 10	●
165 ± 10	130 ± 15	250	5, 10	●
170 ± 10	130 ± 15	250	5, 10	●
175 ± 10	140 ± 15	250	5, 10	●
180 ± 10	140 ± 15	250	5, 10	●

● DENOTES FOR APPROVED (●表示已取得认证)