

ROTARY VARIABLE RESISTORS

旋轉式碳膜電位器

RV 12□□ SERIES (With Metal Shaft)

主要特點：微型雙連旋轉式的碳膜電位器。




GENERAL FEATURES: Rotary dual gang slim type potentiometer.

零件編號
MODEL NO.




外形圖
OUTLINE DRAWING

安裝孔詳細位置
MOUNTING HOLE DETAIL




RV 123LN(PH)

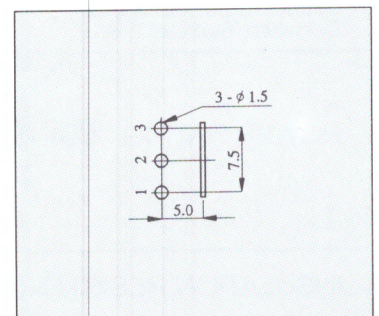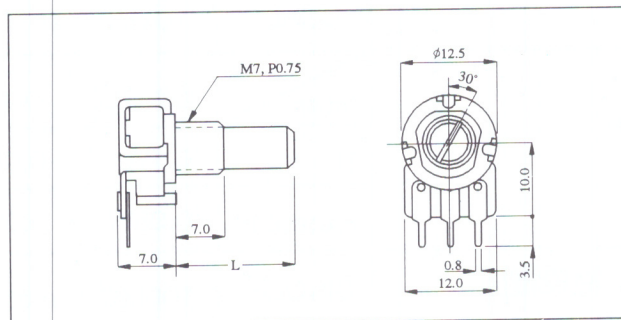




RV 123GN(PH)

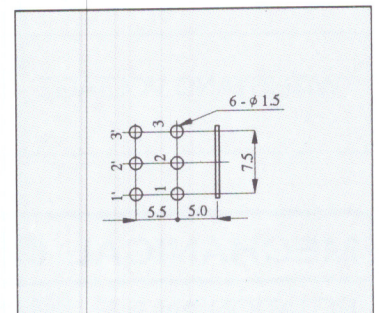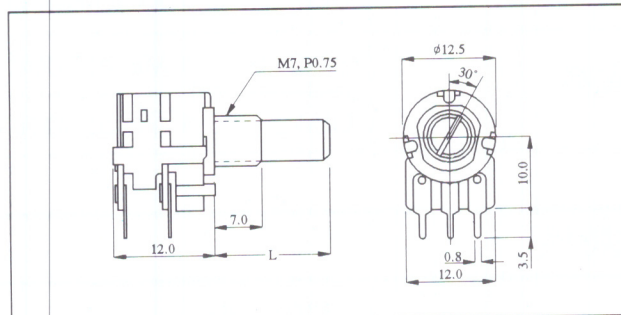

RV 124LN

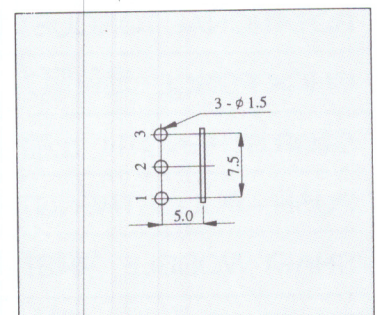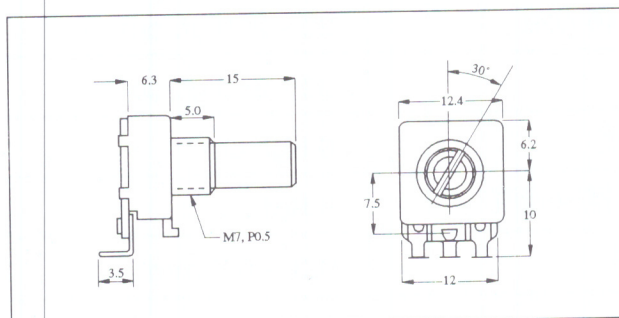

RV 124LN(PH)

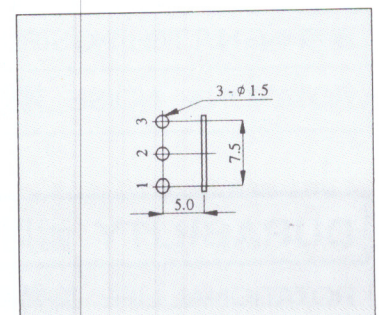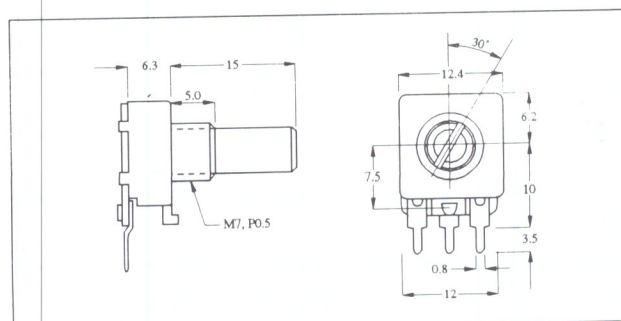

ROTARY VARIABLE RESISTORS




旋轉式碳膜電位器

零件編號
MODEL NO.




外形圖
OUTLINE DRAWING

安裝孔詳細位置
MOUNTING HOLE DETAIL

RV 123NS(PH)

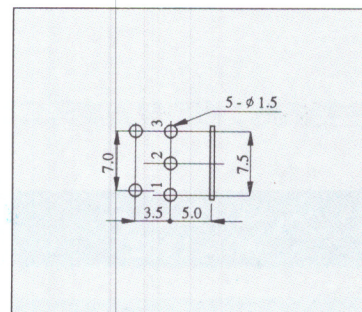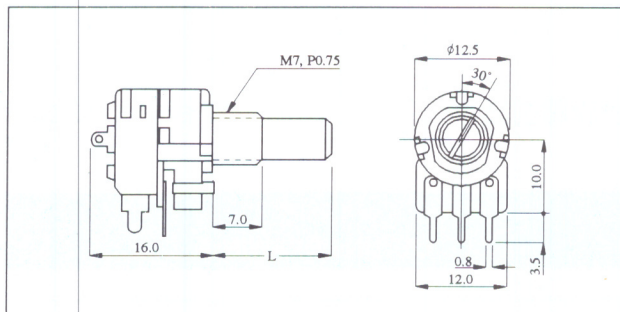

RV 123GS(PH)

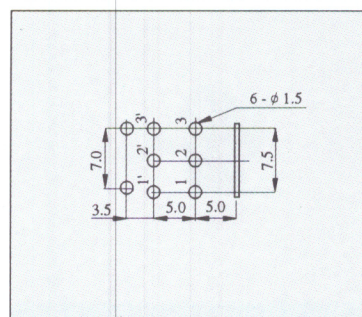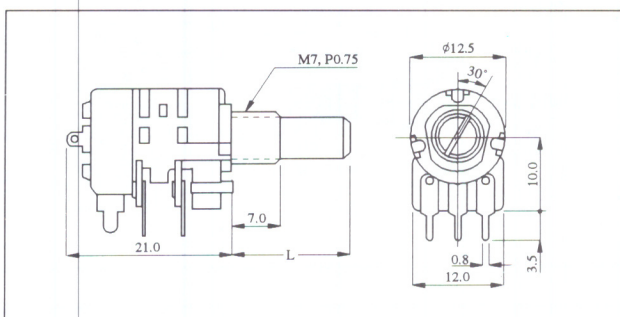

SPECIFICATIONS 特性

ELECTRICAL 電器特性		
RESISTANCE RANGE 阻值範圍		500Ω - 1MΩ
RESISTANCE TOLERANCE 阻值誤差		± 20%
RESISTANCE TAPER 電阻規律		A. B. C. D. W
RESIDUAL RESISTANCE 殘留電阻 Between Terminal 1 & 2 Between Terminal 2 & 3		10Ω/10Ω
POWER RATING 額定功率		0.1W
INSULATION RESISTANCE 絕緣電阻		50MΩ Min at 500V DC
WITHSTAND VOLTAGE 耐電壓		1 Min at 500V AC

MECHANICAL 機械特性		
ROTATION ANGLE 旋轉角		300° ± 5°
ROTATIONAL TORQUE 旋轉力矩		20 - 250 gf. cm
STOP STRENGTH 止擋強度		3 Kgf. cm
ROTATIONAL NOISE 轉動噪音		47 (Mv)

DURABILITY 耐用性		
ROTATIONAL LIFE 旋轉壽命		15,000 Cycles